



HDMI to DVI + Audio Quick Installation Guide

Introduction

The *HDMI to DVI + Audio* provides an easy solution for converting digital HDMI to digital video (DVI-D) and both digital audio (S/PDIF) and analog stereo audio. This device enables you to connect full digital video and audio to DVI enabled monitors and coaxial S/PDIF equipped audio receivers and amplifiers for highest compatibility to your home theater system.

Features and Benefits

- HDMI 1.2a compliant
- Fully HDCP compliant
- Supports DVI video up to 165 MHz
- Coaxial S/PDIF and stereo analog audio outputs
- Front panel LED indicators
- Works with various types of HDMI based audio/video devices including DVD players, game consoles, camcorders, set-top boxes

Package Contents

- HDMI to DVI + Audio converter
- Power adapter (5V, 2A)
- Quick installation guide

Technical Specifications

- Video Amplifier Bandwidth: 1.65 Gbps
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts p-p (TTL)
- Single Link Range: 1080p/1920 x 1200
- HDMI connector: 19 pin type female connector
- DVI connector: DVI-I 29 pin female (digital only)
- RCA connector: Coaxial S/PDIF
- Audio out: Analog stereo jack
- Power supply: Output - 5VDC, 2A
- Power consumption: 10 watts (max)

Layout

Front Panel

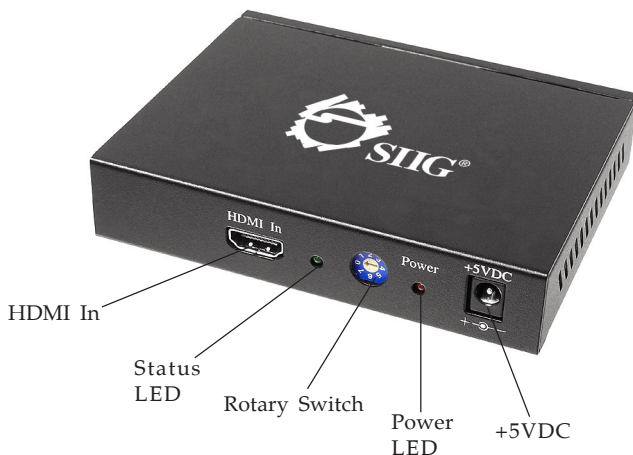


Figure 1: Front Panel

Rear Panel



Figure 2: Rear Panel

Rotary Switch

The function of the rotary switch is reserved, please keep the rotary switch at 0.

- Position 0: Analog audio output
- Position 1: Analog audio output
- Position 2: Analog audio output
- Position 3: Analog audio output
- Position 4 & 5 : Reserved
- Position 6: Restore default EDID
- Position 7: Learn EDID of HDMI equipped device

Hardware Installation

General instructions for connecting devices are provided below. Please consult your device's users manual for more information, if needed.

1. Connect your HDMI source to the HDMI input connector.
2. Connect your DVI enabled monitor to the DVI out port.
3. Connect your S/PDIF AV receiver into the S/PDIF Out.
4. Connect your PC speaker into the Audio Out jack.
5. Plug the power adapter into the +5VDC jack then plug the power adapter into a reliable power outlet.

Note: S/PDIF format is dependent upon the embedded digital audio in the HDMI stream. The S/PDIF receiver must be able to recognize the input S/PDIF format. This converter only separates the digital audio in the HDMI stream, and passes the audio to the output.

Connecting Devices

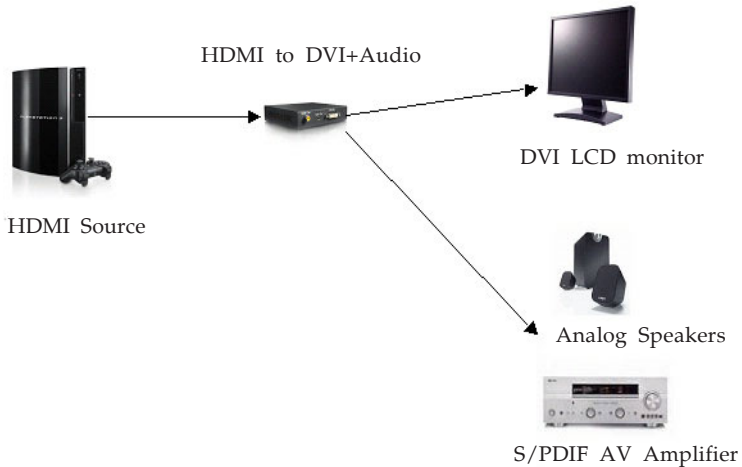


Figure 3: Connecting Devices

Safety Precautions

Like all electronic equipment the *HDMI to DVI + Audio* should be used with care. Please read and follow the safety precautions to protect yourself from possible injury and minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on the unit
- Provide proper ventilation and air circulation, do not use near water
- Do not service the unit yourself, except where explained in the manual
- Use only the power adapter and accessories that came with the unit

Notes

- Audio Out jack supports 2-channel stereo audio only
- S/PDIF Out supports up to 8-channel audio output (depending on the audio source)

Technical Support and Warranty

QUESTIONS? SIIG's **Online Support** has answers! Simply visit our web site at www.siig.com and click **Support**. Our online support database is updated daily with new drivers and solutions. Answers to your questions could be just a few clicks away. You can also submit questions online and a technical support analyst will promptly respond.

SIIG offers a 3-year manufacturer warranty with this product. This warranty covers the original purchaser and guarantees the product to be free of any defects in materials or workmanship for three (3) years from the date of purchase of the product.

SIIG will, at our discretion, repair or replace (with an identical product or product having similar features and functionality) the product if defective in materials or workmanship. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Please see our web site for more warranty details.

If you encounter any problems with this product, please follow the procedures below.

A) If it is within the store's return policy period, please return the product to the store where you purchased it.

B) If your purchase has passed the store's return policy period, please follow these steps to have the product repaired or replaced.

Step 1: Submit your RMA request. Go to www.siig.com, click **Support**, then **RMA** to submit a request to [SIIG RMA](#) or fax a request to 510-657-5962. Your RMA request will be processed, if the product is determined to be defective, an RMA number will be issued.

Step 2: After obtaining an RMA number, ship the product.

- Properly pack the product for shipping. All software, cable(s) and any other accessories that came with the original package must be included.
- Clearly write your RMA number on the top of the returned package. SIIG will refuse to accept any shipping package, and will not be responsible for a product returned without an RMA number posted on the outside of the shipping carton.
- You are responsible for the cost of shipping to SIIG. Ship the product to the following address:

SIIG, Inc.
6078 Stewart Avenue
Fremont, CA 94538-3152, USA

RMA #: _____

- SIIG will ship the repaired or replaced product via Ground in the U.S. and International Economy outside of the U.S. at no cost to the customer.

About SIIG, Inc.

Founded in 1985, SIIG, Inc. is a leading manufacturer of IT connectivity solutions (including Serial ATA and Ultra ATA Controllers, FireWire, USB, and legacy I/O adapters) that bridge the connection between Desktop/ Notebook systems and external peripherals. SIIG continues to grow by adding A/V and Digital Signage connectivity solutions to our extensive portfolio. All centered around the distribution and switching of A/V signals over CAT5/6, these products include matrix switches, distribution amplifiers, extenders, converters, splitters, cabling, and more.

SIIG is the premier one-stop source of upgrades and is committed to providing high quality products while keeping economical and competitive prices. High-quality control standards are evident by one of the lowest defective return rates in the industry. Our products offer comprehensive user manuals, user-friendly features, and most products are backed by a lifetime warranty.

SIIG products can be found in many computer retail stores, mail order catalogs, and e-commerce sites in the Americas, as well as through major distributors, system integrators, and VARs.

PRODUCT NAME

HDMI to DVI+Audio

FCC RULES: TESTED TO COMPLY WITH FCC PART 15, CLASS B OPERATING ENVIRONMENT: FOR HOME OR OFFICE USE

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

THE PARTY RESPONSIBLE FOR PRODUCT COMPLIANCE

SIIG, Inc.
6078 Stewart Avenue
Fremont, CA 94538-3152, USA
Phone: 510-657-8688

HDMI to DVI+Audio is a trademark of SIIG, Inc. SIIG and the SIIG logo are registered trademarks of SIIG, Inc. Other names used in this publication are for identification only and may be trademarks of their respective owners.