

**Dear Valued Customer**

(JUST WANTED YOU TO KNOW)

**WE REALLY  
APPRECIATE  
YOUR PURCHASE**

*~thank you~*

## Features

- Transmission Range: Up to 990 ft (300 meters)
- Support Coaxial or Toslink input  
( Please do not input two signal simultaneously)
- Support Coaxial & Toslink output simultaneously
- Support Digital 5.1 (DTS, Dolby Digital, etc.) and 2ch PCM
- High performance, zero signal loss
- Data Transmission Rate: 12.8 Mb/s
- S/PDIF (Digital Coaxial): 96 kHz performance

## Package contents

- Transmitter unit
- Receiver unit
- Power adapter DC 5V/1A
- Quick Start Guide

## Layout




1. Toslink input
2. Coaxial input
3. RJ-45: connect to RX via CAT5e/6 cable
4. DC power: 5V/1A



1. RJ-45: connect to TX via CAT5e/6 cable
2. Coaxial output
3. Toslink output

# Application

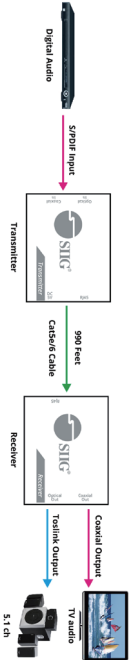

## Audio Extender Over Cat5e/6 Cable with PoC

### Quick Start Guide



### Support

For more info or tech support  
<http://www.siig.com/support>

