



# 3-in-1 USB Power Bank Charger - Black / White

## User Reference Guide

### Introduction

---

The *3-in-1 USB Power Bank Charger* with 2 USB charging ports provides efficient and convenient multiple charging solutions to USB powered devices.

### Key Features and Benefits

- Two USB charging ports provide total power output up to 3.4A, fast charging two devices simultaneously
- Plugs into an AC outlet to use as a conventional USB wall charger, compatible with 100V~240VAC power source
- 6000mAh Lithium-ion *Power Bank* supports full charge to smartphones, tablets, and many other USB powered portable devices
- Includes 12V DC power adapter to use as a portable USB car charger

## Package Contents

- *3-in-1 USB Power Bank Charger- Black / White*
- 12V DC Car Adapter
- Micro USB Charging Cable
- User Reference Guide

## Specifications

Port	2 USB Charging ports
Power Input	AC 100~240V or DC12V / 1.5A
Power Output	5V / 1A & 5V /2.4A (Max.)
Capacity	6000mAh (native)
Included USB Cable Length	8.66" (22cm)
Dimensions	4.13" (W) x 1.10" (H) x 2.76" (D)
Weight	0.42 lbs
Operating Temperature	32 to 104 degrees F
Storage Temperature	-4 to 158 degrees F

# Layout

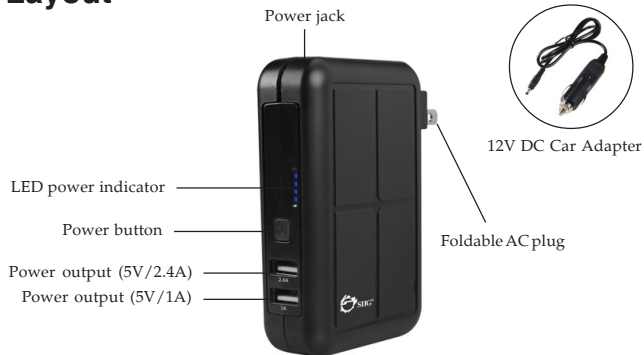


Figure 1: 3-in-1 USB Power Bank Charger

- **Foldable AC plug:** Plugs into a reliable wall outlet
- **Power jack:** Connects to the vehicle's DC outlet (12V) using the included 12V DC Car Adapter
- **LED power indicator:** On/Off when the power is On/Off and battery charge level indicator

one LED on	two LEDs on	three LEDs on	four LEDs on
<25%	25%-50%	50%-75%	75%-100%

Table 1: Battery Charge Level Guide

- **Power Button:** Press to turn on the *3-in-1 USB Power Bank Charger*, press it again within 1 second to turn it off. The *Power Bank* will shut off after approximately 20 seconds inactive.
- **Power output (5V/2.4A):** Connects to tablets or other USB powered devices that requires more charging power  
(Note: This port will adjust the output current automatically according to the connected device)
- **Power output (5V/1A):** Connects to USB powered portable devices

## Instructions for Use

---

### Charging the *Power Bank*

**Note:** It is recommended to fully charge the *Power Bank* before use. When the *Power Bank* is low on charge, the LED power indicator will blink.

#### 1. **Charging via Wall Outlet**

Unfold the AC plug and plug the *Power Bank* into a reliable power outlet.

## Charging via 12V DC Outlet

Use the included **12V DC Car Adapter** to connect the *Power Bank* to a 12V DC outlet.

2. The LED power indicator blinks while charging the *Power Bank*.
3. When the *Power Bank* is fully charged, four LEDs will be solid blue.
4. Disconnect the *Power Bank* from the power outlet, it will power off automatically.

## Charging your USB Device

**Note:** It is recommended to use the included USB Charging Cable or your USB device's original equipment USB charging cable.

### Wall / Car Charger

1. Connect the *Charger* to a reliable power source (AC 100~240V or DC outlet 12V).
2. Connect your USB device to the proper power output (5V/1A or 5V/2.4A) using a USB charging cable.
3. When the USB device is fully charged, disconnect it from the *Charger*, and unplug the *Charger* from the power source.

## Power Bank

It is recommended to fully charge the *Power Bank* before use. See **Charging the Power Bank** on page 4 for more details.

1. Press the *Power Bank's* power button to turn it on, verify the LED power indicator is on.
2. Connect your USB device to a power output using a USB charging cable.
3. When the USB device is fully charged, disconnect it from the *Power Bank*. The *Power Bank* will power off automatically.

## Notice

---

- **DO NOT** connect the *Charger* to the vehicle's 12V DC outlet before starting the car
- **ALWAYS UNPLUG** the *Power Bank Charger* from the power source when not in-use
- **DO NOT** store or use the *Power Bank Charger* in high temperatures, damp areas, or in direct sunlight
- **DO NOT** open the *Power Bank Charger's* case, doing so will void the warranty
- Keep the *Charger* **out of** the reach of children

# Technical Support and Warranty

---

**QUESTIONS?** SIIG's **Online Support** has answers! Simply visit our web site at [www.siig.com](http://www.siig.com) and click **Support**. Our online support database is updated daily with new drivers and solutions. Answers to your questions could be just a few clicks away. You can also submit questions online and a technical support analysts will promptly respond.

SIIG offers a 1-year manufacturer warranty with this product. This warranty covers the original purchaser and guarantees the product to be free of any defects in materials or workmanship for one (1) year from the date of purchase of the product.

SIIG will, at our discretion, repair or replace (with an identical product or product having similar features and functionality) the product if defective in materials or workmanship. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Please see our web site for more warranty details.

If you encounter any problems with this product, please follow the procedures below.

A) If it is within the store's return policy period, please return the product to the store where you purchased from.

B) If your purchase has passed the store's return policy period, please follow the steps below to have the product repaired or replaced.

**Step 1:** Submit your RMA request.

Go to [www.siig.com](http://www.siig.com), click **Support**, then **RMA** to submit a request to [SIIG RMA](#) or fax a request to 510-657-5962. Your RMA request will be processed, if the product is determined to be defective, an RMA number will be issued.

**Step 2:** After obtaining an RMA number, ship the product.

- Properly pack the product for shipping. All accessories that came with the original package must be included.
- Clearly write your RMA number on the top of the returned package. SIIG will refuse to accept any shipping package, and will not be responsible for a product returned without an RMA number posted on the outside of the shipping carton.
- You are responsible for the cost of shipping to SIIG. Ship the product to the following address:

**SIIG, Inc.**

**6078 Stewart Avenue**

**Fremont, CA 94538-3152, USA**

**RMA #:** \_\_\_\_\_

- SIIG will ship the repaired or replaced product via Ground in the U.S. and International Economy outside of the U.S. at no cost to the customer.

# About SIIG, Inc.

---

Founded in 1985, SIIG, Inc. is a leading manufacturer of IT connectivity solutions (including Serial ATA and Ultra ATA Controllers, FireWire, USB, and legacy I/O adapters) that bridge the connection between Desktop/Notebook systems and external peripherals. SIIG continues to grow by adding A/V and Digital Signage connectivity solutions to our extensive portfolio.

SIIG products offer comprehensive user manuals, many user-friendly features, and are backed by an extensive manufacturer warranty. High quality control standards are evident by the overall ease of installation and compatibility of our products, as well as one of the lowest defective return rates in the industry. SIIG products can be found in computer retail stores, mail order catalogs, through major distributors, system integrators, and VARs in the Americas and the UK, and through e-commerce sites.

## **PRODUCT NAME**

3-in-1 USB Power Bank Charger - Black / White

FCC RULES: TESTED TO COMPLY WITH FCC PART 15, CLASS B  
OPERATING ENVIRONMENT: FOR HOME OR OFFICE USE

## **FCC COMPLIANCE STATEMENT:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## **THE PARTY RESPONSIBLE FOR PRODUCT COMPLIANCE**

SIIG, Inc.

6078 Stewart Avenue

Fremont, CA 94538-3152, USA

Phone: 510-657-8688

3-in-1 USB Power Bank Charger - Black / White is a trademark of SIIG, Inc. SIIG and the SIIG logo are registered trademarks of SIIG, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation. All other names used in this publication are for identification only and may be trademarks of their respective owners.