

Dear Valued Customer

(JUST WANTED YOU TO KNOW)

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~

Features

- Auto 12G/6G/3G/HD/SD-SDI detection
- Supports HDMI 2.0 & below
- Supports PCM 7.1ch
- One SDI loop-out
- Supported resolutions

12G-SDI	
4K2K @50/59.94/60Hz	SMPTE ST-2082
6G-SDI	
4K2K @23.98/24, 25, 29.97, 30Hz	SMPTE ST-2081
3G-SDI	
1080p @ 50/ 59.94 / 60Hz	SMPTE 424M, SMPTE 425M
HD-SDI	
720p @ 50Hz	SMPTE 296M -3
720p @ 60 / 59.94Hz	SMPTE 296M -1, -2
1080i @ 50Hz	SMPTE 274M -6
1080i @ 60 / 59.94Hz	SMPTE 274M -4, -5
1080p @ 24 / 23.98Hz	SMPTE 274M -10, -11
1080p @ 25Hz	SMPTE 274M -9
1080p @ 30 / 29.97Hz	SMPTE 274M -7, -8
SD-SDI	
NTSC	
PAL B,D,G,H,I	

Package contents

- 12G-SDI to HDMI 2.0 Converter
- Power adapter DC 12V/2A
- Ear mount kit
- Quick Start Guide

Layout



1. SDI IN: 12G/6G/3G/HD/SD-SDI input
2. SDI LOOPOUT: 12G/6G/3G/HD/SD-SDI output
3. Micro USB: Micro-USB port for F/W update
4. HDMI OUT: Connects to a HDMI display
5. Power LED indicator
6. Power Jack: DC 12V/2A

Notes

Video input support

[12G] 4K2K@50/59.94/60Hz (4:2:2)

[6G] 4K2K@23.98/24, 25, 29.97, 30Hz (4:2:2)

[3G] 1080p@50/59.94/60Hz (4:2:2)

[HD] 1080p@23.98/24/25/29.97/30Hz (4:2:2)

720p@50/59.94/60Hz, 1080i@50/59.94/60Hz,

[SD] – NTSC @59.94Hz, PAL @50Hz (4:2:2)


Cable equalization

[12G-SDI] up to 80m (264ft)

[6G-SDI] up to 110m (363ft)

[3G-SDI] up to 220m (726ft)

Application

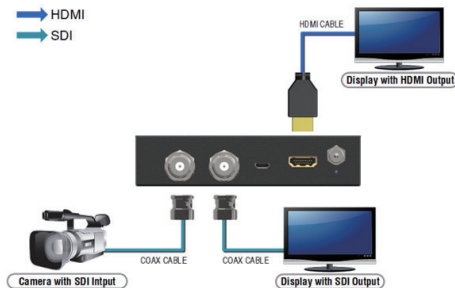

Support

For more info or tech support
<http://www.siig.com/support>



12G-SDI to HDMI 2.0 Converter

Quick Start Guide

