



10-Port Industrial USB 3.1 Gen 1 with Dual USB-C Hub & Charging User Manual



04-1333A

P/N: ID-US0811-S1



Safety and Notice

The device has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment, the device should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit.
- Always unplug the power to the device before cleaning.

Features

- Support seven USB 3.1 Gen 1 TYPE-A ports, 5Gbps, 5V/900mA
- Support two USB 3.1 Gen 1 TYPE-C ports, 5Gbps, 5V/1.5A
- Support USB 3.0 UASP mode
- Support one charging-only port 5V/2.4A
- Built-in over-current protection to protect the hub and connected devices
- Included 19V/3.42A power adapter to provide full power output for all ports
- Terminal block DC 5V to DC 19V power input (redundancy)
- Power input surge protection (600W)
- Over-current detection and protection circuit design
- Wall and DIN rail mount support



Package contents

- 10-Port Industrial USB 3.1 Gen 1 with Dual USB-C Hub & Charging
- Switching power adapter (19V/3.42A) & AC power cord
- USB 3.1 Gen 1 Type-A to Type-B cable
- DIN-Rail and wall mount kit
- Terminal block
- User manual

System Requirements



- Notebook & PC with an available USB 3.1Gen1 Type-A port
- Windows® 10 / 8.x / 7 / XP (32-/64-bit)
- Mac OS® 10.6 or later

Layout

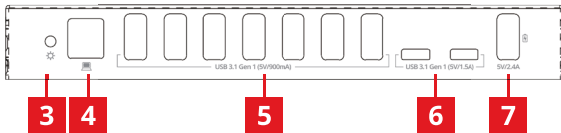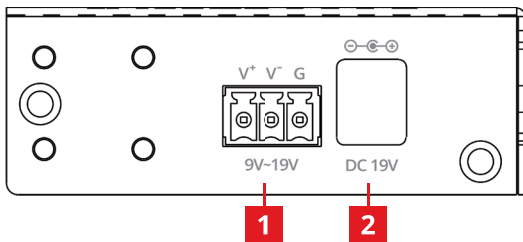


1. **Terminal block DC 5V to DC 19V power input**
Left to right V+, V-, G
2. **DC power in 19V/3.42A**
3. **Power indicator**
4. **USB Host: Connect to a USB 3.1 Gen 1 source**
5. **USB 3.1 Gen1 Type-A ports: 5Gbps, 5V/900mA**
6. **USB 3.1 Gen1 Type-C ports: 5Gbps, 5V/1.5A**
7. **USB Type-A charging-only port: 5V/2.4A**
No data connection

DIN-Rail Mounting

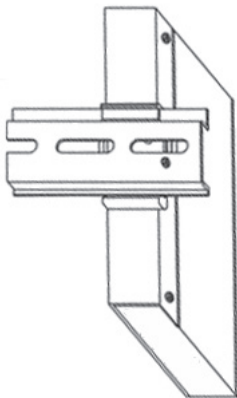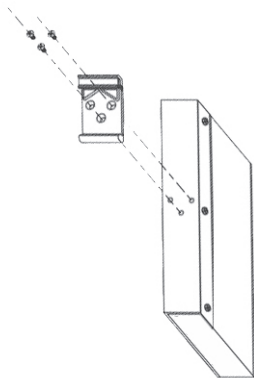

Wall Mount Plate Mounting

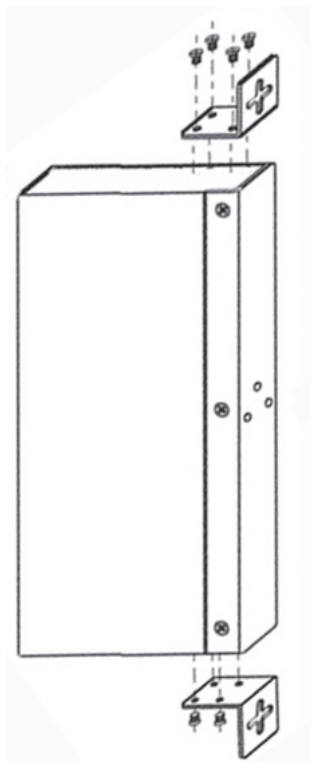

Dear Valued Customer

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~

Support

For more info or tech support

<http://www.siig.com/support>