

Features

- Support two 4K@60 DP monitor output
- Support single 5K@30 DP monitor output via two DP ports
- Support USB 3.1 Gen 2 10Gbps and BC1.2 charging on one Type-A port & two Type-C ports
- Support USB PD charging 60W

System Requirements

- Laptop with an available Thunderbolt 3 port or USB-C host port with DP Alt mode
- Windows® 10 (32/64 bit)
- Mac OS X® 10.13 or later

Package contents

- Thunderbolt 3 Docking Station
- Power adapter DC 20V/6.75A
- Thunderbolt 3 Cable
- Quick Start Guide

Layout



1. **Thunderbolt 3:** Connect to Thunderbolt 3 or USB-3.1 host port
2. **USB 3.1 Gen2 Type-A:** Connect to a USB device(10 Gbps, BC1.2 5V/1.5A)
3. **Headset:** Connect to a headset (2.1ch)




4. **LAN:** Gigabit Ethernet port (Full Duplex 10/100/1000 Mbps)
5. **USB 3.0 Typ-A:** Connect to a USB device (5 Gbps, 5V/900mA)
6. **USB 3.1 Gen2 Type-C:** Connect to a USB device(10 Gbps, BC1.2 5V/1.5A)
7. **Display port:** Connect to 4K DP monitors (up to 3840x2160@60Hz)
8. **Power Jack:** DC 20V/6.75A

NOTE:

- Thunderbolt 3 - 40 Gbit/s have to use the cable which support Thunderbolt 3 40G. Please use attached Thunderbolt 3 cable or other Thunderbolt 3 active cables.
- If connect to USB 3.1 host, all USB port will down to 5 Gbps and DP output can only support 1080p monitor.
- In Windows 10 you might see a pop-up message requesting permission to allow the docking to connect to your computer. If you see this pop-up message, select Always Connect from the list and click OK. If required, follow any other on-screen instructions to complete the installation.

Application

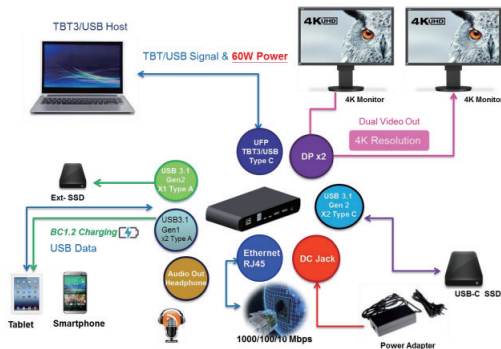

Thunderbolt 3 Dual DP 4K Video Docking Station with PD - Titan Ridge

Quick Start Guide



Support

For more info or tech support
<http://www.siig.com/support>

