



HDMI Over IP Extender with IR User Manual



Important Instructions

- Suggest using IGMP switches
- Do not mix up transmitter and receiver before installation.
- Channel of the transmitter(TX) must be different, otherwise, the system would be break down (including transmitter, receiver, IGMP switch etc.).

Product Features


1. Resolution supported is up to 1080p 60Hz full HD.
2. Transmission distance is up to 120 meters via CAT6.
3. Support IR pass back function to control source device from RX location.
4. Offers scalable and flexible input-output matrix configuration, allows 100 input to infinite output.
5. Supports computer control software to select and switch source device input..

Package Contents

1. Transmitter unit / Receiver unit
2. User Manual
3. IR blaster / receiver extension cable
4. Power adapter DC5V/2A x 2
5. Remote control
6. 3 pin phoenix connector x 2
7. Wall-mount kit x 2


Layout

Transmitter unit

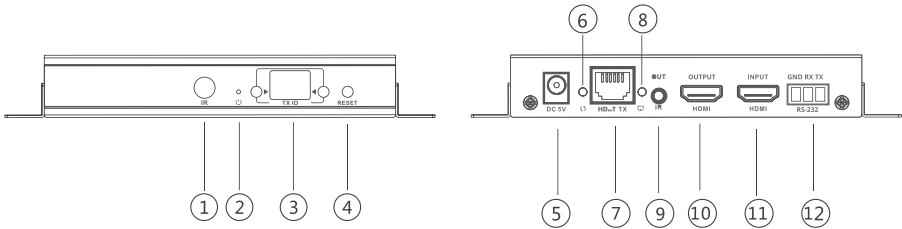

1. IR Window	Receives IR signals from the included remote control to set/select the channel
2. Power LED	On when transmitter is powered on
3. TX ID	Displays transmitter's ID number
4. Reset Button	Press the button to reset the transmitter
5. Power Jack	Connects to the included power adapter
6. Data LED	Blinks when data transmission is detected
7. RJ45 Output	Connects to the receiver's RJ45 Input using a CAT5e/6 cable
8. Link LED	Lights up when RJ45 signal detected
9. IR Output	Connects to the IR Blaster extension cable
10. HDMI Out	Connects to a local HDMI display
11. HDMI Input	Connects to the HDMI source device
12. RS232	RS232 pass through

Receiver unit

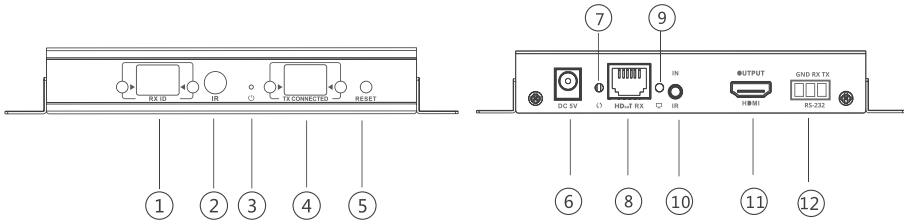

1. RX ID	Displays the receiver's ID number
2. IR Window	Receives IR signals from the included remote control to set/select the channel
3. Power LED	On when receiver is powered on
4. TX Connected	Displays transmitter's ID number for device pairing
5. Reset Button	Press the button to reset the receiver
6. Power Jack	Connects to the included power adapter
7. Data LED	Blinks when data transmission is detected
8. RJ45 Input	Connects to the transmitter's RJ45 Output using a CAT5e/6 cable
9. Link LED	Lights up when RJ45 signal detected
10. IR Input	Connects to the IR receiver extension cable
11. HDMI Out	Connects to a HDMI display
12. RS232	RS232 pass through


Application

Point to point



Matrix configuration

Maximum 256 combined units, limited to 100 transmitter units.

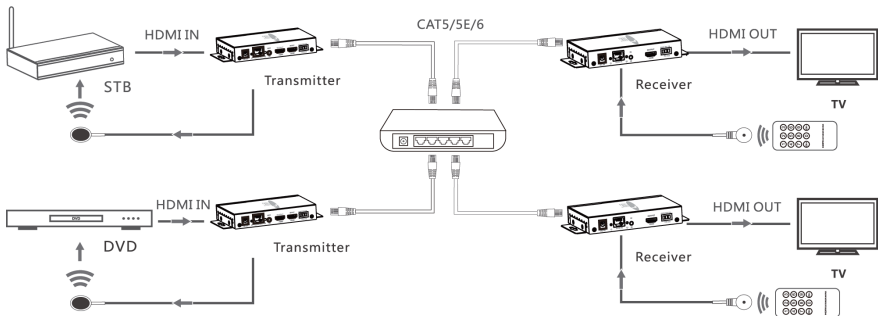

Note:

We recommend CAT5e/6 with 100% copper wiring and IEEE-568B wiring standard.

Dedicated IGMP Gigabit Ethernet switches are recommended for the best performance and reliability.

When connecting to an existing LAN environment, it's recommended to configure a VLAN dedicated to these transmitter(s) and receiver(s) to avoid traffic collision with other networking devices.

The transmitter's and receiver's default IP address is 192.168.1.238 and 192.168.1.239 respectively. If your existing network is DHCP enabled, the transmitter(s) and receiver(s) will be assigned with IP addresses automatically when connected and turned on. Press the reset button on each transmitter and receiver if an IP address is not assigned automatically.

Resetting to Default IP Address

The Transmitter's default IP address is 192.168.1.238, the Receiver's default IP address is 192.168.1.239. If you need to reset the units to the default IP address simply disconnect the TX or RX unit from the IP network, then quickly press the Reset button. Wait several seconds and power off and on the units.

IR User Guide

IR Extension Cables

The IR Blaster extension cable should be plugged into the IR Out port of the transmitter and the IR Receiver extension cable should be plugged into the IR In port of the receiver. The emitter of the IR Blaster extension cable should be placed as close to the IR receiver window of the source device.

Remote Control

Use the included remote control to set/select the TX ID on the transmitter and the TX connected ID on the receiver for device pairing.


Device ID Control User Guide

Press the left or right button control to change the Device ID and Connection ID to the desired number. To connect to the desired HDMI source device, set the Receiver's TX Connected ID to match the Transmitter's TX ID for successful device pairing.

Computer Control User Guide

The HDbitt E-Matrix Control Center application is compatible with Windows only. Download it from www.hdbitt.com/download-matrix.

1. Connect your Windows computer to the Ethernet network.
2. For **non-DHCP** networks:
Change your computer's IP address to 192.168.1.xxx (xxx can be 0 to 255, excluding 210 & 220), the same subnet as your TX and RX unit.
For **DHCP** enabled networks:
Enable DHCP on your computer and connect it to the network.
(Note: If DHCP is enabled simply plug into your network)
3. Open the application, the interface is displayed.

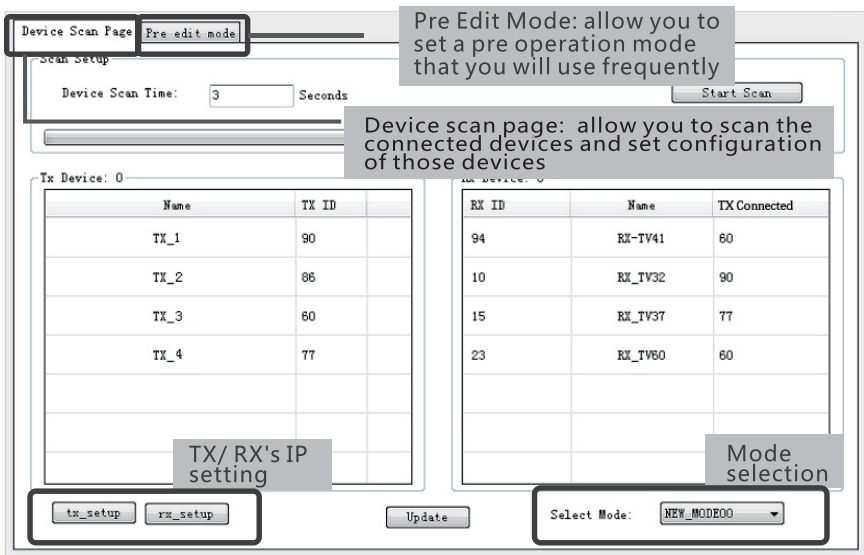


Note: If the Matrix Control Center application is not working properly. Close and restart it to clear the previous settings.

IP Setting

The Transmitter's default IP address is 192.168.1.210, the Receiver's default IP address is 192.168.1.220. There is no need to change the IP address even when multiple transmitters and/or receivers are connected to your IP network simultaneously. However, if a change is needed follow the steps below.

1. Click Tx setup
2. Enter the desired IP address, click Update to save the changes.

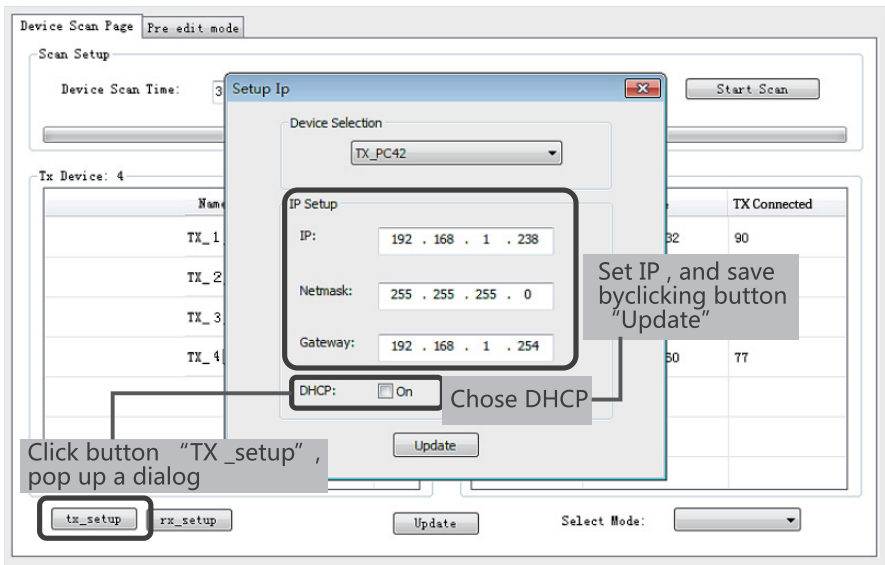

Device Scan Page Pre edit mode

Scan Setup

Device Scan Time: 3

Start Scan

Tx Device: 4

Name	TX Connected
TX_1	92 90
TX_2	
TX_3	
TX_4	50 77

Device Selection: TX_PC42

IP Setup

IP: 192 . 168 . 1 . 238

Netmask: 255 . 255 . 255 . 0

Gateway: 192 . 168 . 1 . 254

DHCP: On

Update

Click button "tx_setup", pop up a dialog

Chose DHCP


Set IP, and save by clicking button "Update"

tx_setup rx_setup Update Select Mode:

Device Name

Use this section to change the device name.

1. Click Start Scan to open the editing window
2. Double click on a TX unit to update, then click OK to save the changes

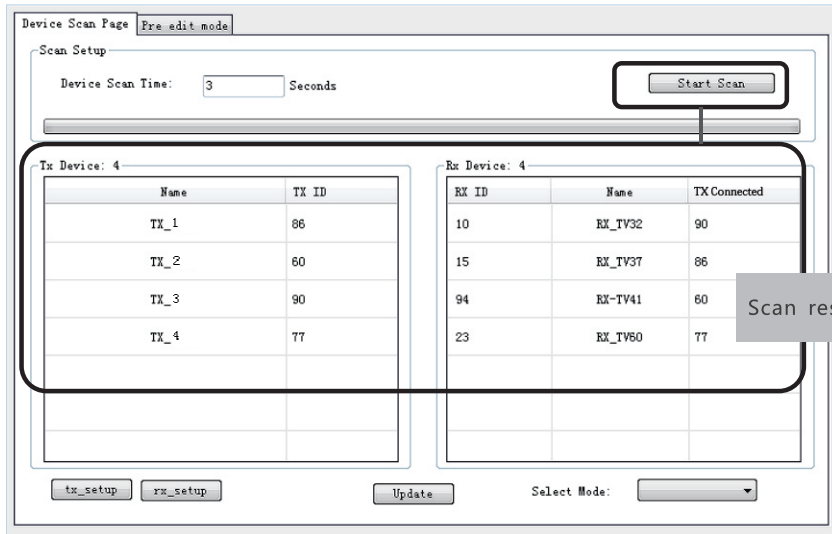

Device Scan Page **Pre edit mode**

Scan Setup

Device Scan Time: Seconds

Tx Device: 4


Name	TX ID
TX_1	86
TX_2	60
TX_3	90
TX_4	77

Rx Device: 4

RX ID	Name	TX Connected
10	RX-TV32	90
15	RX-TV37	86
94	RX-TV41	60
23	RX-TV60	77

Scan results

Select Mode:

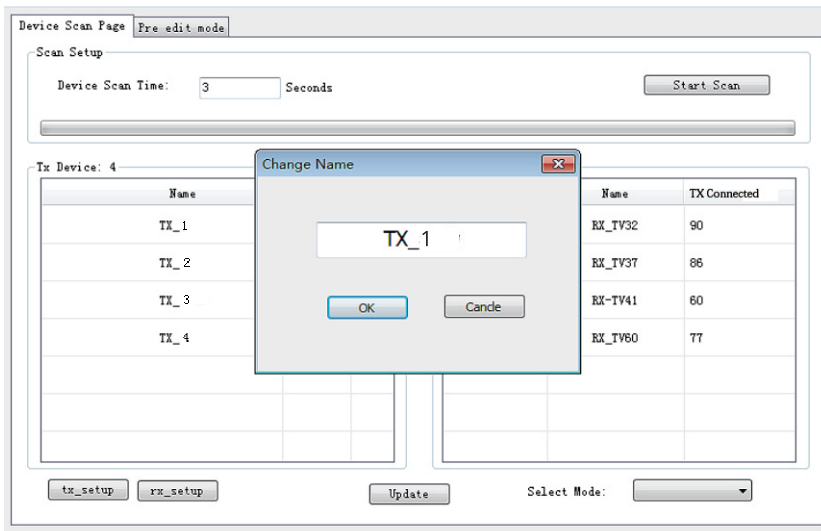

Device Scan Page **Pre edit mode**

Scan Setup

Device Scan Time: Seconds

Tx Device: 4

Name	TX ID
TX_1	86
TX_2	60
TX_3	90
TX_4	77

Rx Device: 4

RX ID	Name	TX Connected
10	RX-TV32	90
15	RX-TV37	86
94	RX-TV41	60
23	RX-TV60	77

Change Name X

Select Mode:

Device ID

1. Click on TX ID of the device you want to change, select an available ID from the drop down box.
2. Click Update to save the changes.

Device Scan Page Pre edit mode

Scan Setup

Device Scan Time: Seconds Start Scan

Tx Device: 4

Name	TX ID
TX_1	87
TX_2	83
	84
	85
TX_3	86
	87
	88
TX_4	89
	91
	92
	93
	94
	95
	96
	97
	98
	99

Rx Device: 4


RX ID	Name	TX Connected
10	EX_TV32	90
15	EX_TV37	86
94	EX-TV41	60
23	EX_TV60	77

Select Mode:

Operating Modes

An operating mode is a group of input and output devices allowing easy selection of desired viewing outcome quickly and stress free.

1. Click on Pre edit mode tab.
2. Select the input and output IDs.
3. Enter a name for the operating mode, then press OK to save.

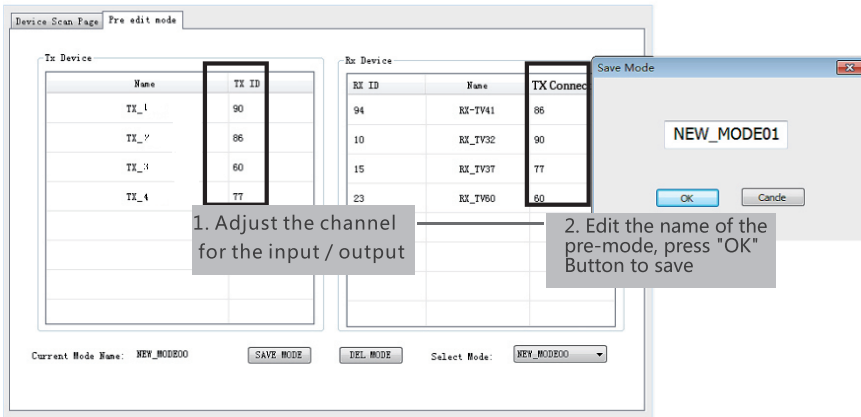

The screenshot shows the 'Pre edit mode' window with two tables for device selection and a 'Save Mode' dialog box. The 'Tx Device' table has columns 'Name' and 'TX ID'. The 'Rx Device' table has columns 'RX ID', 'Name', and 'TX Connect'. The 'Save Mode' dialog box has a text input field containing 'NEW_MODE01' and 'OK' and 'Cancel' buttons.

1. Adjust the channel for the input / output

2. Edit the name of the pre-mode, press "OK" Button to save


Name	TX ID
TX_1	90
TX_2	86
TX_3	60
TX_4	77

RX ID	Name	TX Connect
94	RX-TV41	86
10	RX_TV32	90
15	RX_TV37	77
23	RX_TV60	60

Current Mode Name: NEW_MODE00 SAVE MODE DEL MODE Select Mode: NEW_MODE00

Operating Mode Selection

1. Click on Select Mode.
2. Choose the desired operating mode.

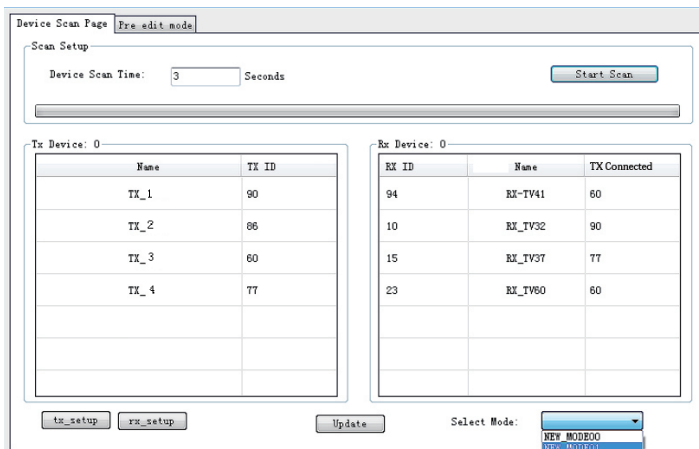

The screenshot shows the 'Pre edit mode' window with the 'Scan Setup' section and the 'Select Mode' dropdown menu. The 'Scan Setup' section has a 'Device Scan Time' field set to 3 seconds and a 'Start Scan' button. The 'Tx Device' and 'Rx Device' tables are shown below. The 'Select Mode' dropdown menu is open, showing 'NEW_MODE00' and 'NEW_MODE01' options.

Device Scan Time: 3 Seconds Start Scan

Tx Device: 0

Name	TX ID
TX_1	90
TX_2	86
TX_3	60
TX_4	77

Rx Device: 0

RX ID	Name	TX Connected
94	RX-TV41	60
10	RX_TV32	90
15	RX_TV37	77
23	RX_TV60	60

tx_setup rx_setup Update Select Mode: NEW_MODE00
NEW_MODE01

Dear Valued Customer

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~

Support

For more info or tech support
<http://www.siig.com/support>