

**Dear Valued Customer**

(JUST WANTED YOU TO KNOW)

**WE REALLY  
APPRECIATE  
YOUR PURCHASE**

***~thank you~***



## Features

- Support dual monitors extended display and each display
- HDMI 1.4 & HDCP 1.2 compliant
- support resolution 4K@30 or 1080p
- Supports independent keyboard & mouse ports and one USB 2.0 port
- Supports hotkeys function
- Support Windows and MacOS
- Support selection via push button , remote control and hotkey

## Package contents


1. KVM Switch
2. USB 2.0 + MIC + HDMI cable x2
3. Power adapter 5V/3A
4. Remote control
5. Quick start guide

## Layout

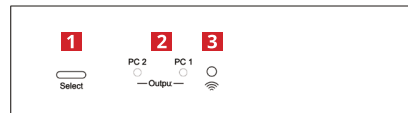


1. Select button: Switch PC1 or PC2
2. PC1/PC2 Indicator:
3. IR receiver:
4. DC jack: DC 5V/3A
5. Connect to Keyboard, Mouse, Mic & HDMI displays
6. Connect to PC1 MIC, USB & HDMI sources
7. Connect to PC2 MIC, USB & HDMI sources

# Application

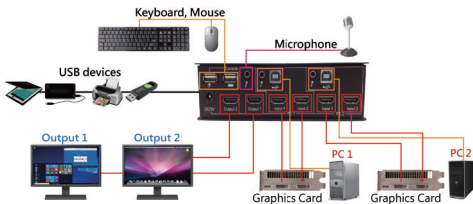

## Instruction for remote control and hotkey

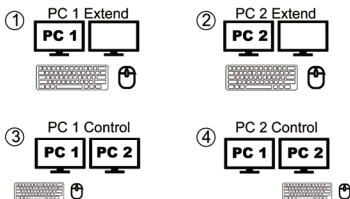

# Keyboard hot key

[Scroll Lock] + [Scroll Lock] + [1]
PC 1 display and control
[Scroll Lock] + [Scroll Lock] + [2]
PC 2 display and control
[Scroll Lock] + [Scroll Lock] + [3]
PC1 main display & PC2 main display, control in PC1
[Scroll Lock] + [Scroll Lock] + [4]
PC1 main display & PC2 main display, control in PC2
[Scroll Lock] + [Scroll Lock] + [Ctrl] + [Enter]
Change function key from [Scroll Lock] to [Ctrl]
[Ctrl] + [Ctrl] + [Scroll Lock] + [Enter]
Change function key from [Ctrl] to [Scroll Lock]

**Support**  
For more info or tech support  
<http://www.siig.com/support>



## 2x1 Dual View USB HDMI KVM Switch - 4K

### Quick Start Guide

