



4K-HDR HDMIover FiberExtender



P/N: AV-GM04G3-S1



Safety and Notice

The **AV-GM04G3-S1 4K-HDR HDMI over Fiber Extender** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the **AV-GM04G3-S1** should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



TABLE OF CONTENTS

INTRODUCTION.....	1
FEATURES.....	1
PACKAGE CONTENTS	1
SPECIFICATIONS	2
PANEL DESCRIPTIONS.....	3
Transmitting unit ► EX-56SZ-TX.....	3
Receiving unit ► EX-56SZ-RX	5
CONNECTION DIAGRAM.....	7
IR PASS-THROUGH.....	8
HDMI PIN DEFINITION.....	10
WARRANTY.....	11

INTRODUCTION

The **AV-GM04G3-S1 4K-HDR HDMI over FiberExtender** boosts up your video/audio transmission distance up to 10km(6.25miles) over single mode fiber optic cables in Ultra-HD4K2K@60 format. Users can readily extend Ultra-HD sources from DVD players, Blu-ray Disc player, PS3, PC, and any other HDMI sources broadcasting to distant display monitors including HDMI or DVI enabled TV sets or LCD PC monitors. Besides **AV-GM04G3-S1** is HDCP compliant, and supports IR and RS-232 pass-through path.

FEATURES

- Supports 4K2K@60 4:4:4 8bits
- Supports HDR*, which is 4K2K@60 4:2:0 10bits**
- Supports HDCP2.2
- Extend HDMI signals up to 10km (6.25miles) over single mode fiber optic cables
- Uncompressed video and audio for no quality loss
- Supports full frequency IR signal from 20KHz to 60KHz
- Bi-directional IR path-through
- Link LED indicator light
- Wall mounting housing design for easy and robust installation



* HDR = High Dynamic Range.

** The video bandwidth of 4K2K@60 4:2:0 10bits (HDR) is 384 MHz, and the 4K2K@60 4:4:4 8bits is 594MHz.



The RS-232 and IR function cannot be used at the same time.

PACKAGE CONTENTS

- 1x AV-GM04G3-S1 [TX & RX]
- 1x IR blaster
- 1x IR receiver
- 2x DC 12V
- 1x User Manual
- 2x Single Mode Module [optional]


SPECIFICATIONS

Model Name		AV-GM04G3-S1	
Technical		AV-GM04G3-S1[Tx]	AV-GM04G3-S1[Rx]
Role of usage		Transmitter [TX]	Receiver [RX]
HDMI compliance		HDMI 2.0a	
HDCP compliance		HDCP2.2	
Video bandwidth		Single-link 600MHz [18Gbps]	
Video support		HDR 4K2K@60 (4:2:0 10bits) / 4K2K@60 (4:4:4 8bits)	
HDMI over fiber		Yes	
Audio support		Surround sound [up to 7.1ch] or stereo audio	
Equalization		Auto	
Input TMDS signal		1.2 Volts [peak-to-peak]	
Input DDC signal		5 Volts [peak-to-peak, TTL]	
ESD protection		Human body model — ±19kV [air-gap discharge] & ±12kV [contact discharge]	
PCB stack-up		6-layer board [impedance control — differential 100Ω; single 50Ω]	
IR pass-thru		Bi-directional	
RS-232 support		Yes	
Input		1x HDMI 1x 3.5mm	1x fiber 1x 3.5mm
Output		1x fiber 1x 3.5mm	1x HDMI 1x 3.5mm
In / Out		1x RS-232	1x RS-232
HDMI source control		Controllable via IR pass-through from RX to TX with IR extenders	
HDMI connector		Type A [19-pin female]	
3.5mm connector		IR receiver / IR blaster	IR receiver / IR blaster
Mechanical		AV-GM04G3-S1[Tx]	AV-GM04G3-S1[Rx]
Housing		Metal enclosure	
Dimension s [L x W x H]	Model	125x112.2x28mm[4.9" x4.4" x1.1"]	125x112.2x28mm[4.9" x4.4" x1.1"]
	Package	371 x 170 x 77mm[1'5" x 6.7" x 3"]	
	Carton	410 x 368 x 393mm[1'3" x 1'4" x 1'5"]	
Weight	Model	463g [16.3 oz]	455g [16 oz]
	Package	1730g [3.8 lbs]	
Fixedness		Wall-mounting case with screws	
Power supply		12V2A	
Power consumption		Max 10W	
Operation temperature		0-50°C	
Storage temperature		-20~60°C [-4~140°F]	
Relative humidity		20~90% RH [no condensation]	

PANEL DESCRIPTIONS


Transmitting unit ► AV-GM04G3-S1-TX

Front Panel

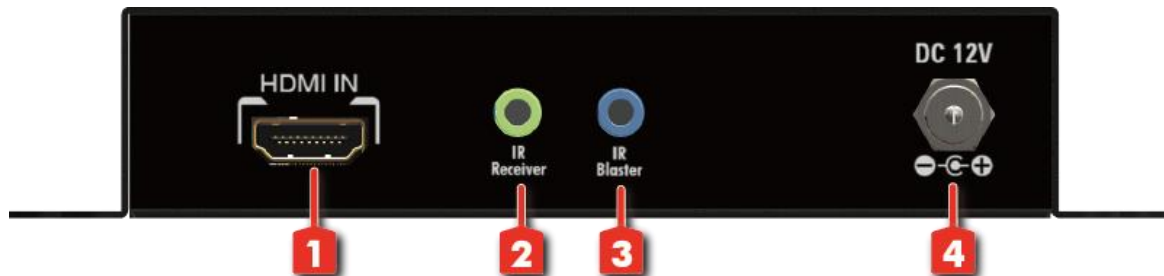

1. **HDMI IN:** Connect to a HDMI source with a HDMI male-male cable
2. **IR Receiver:** Infrared 3.5mm socket for plugging in the extension cable of IR receiver
3. **IR Blaster:** Infrared 3.5mm socket for plugging in the extension cable of IR blaster
4. **+12V DC:** Connect to a 12V power supply unit


Rear Panel

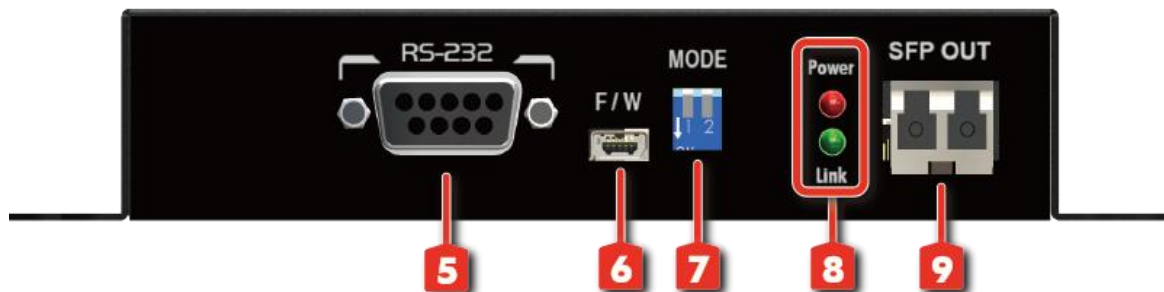

5. **RS-232:** Connect to serial port device with a DSUB-9 male-male or male-female cable here
6. **Mini USB:** F/W update
7. **Dip Switch**
[Pin 1]: F/W update mode
OFF [▲] – Normal; ON [▼] – FW update
[Pin 2]: Reserved
8. **LED indicator:**
[Red]: Power LED indicator
[Green]: Link LED indicator
9. **SFP OUT:** Plug in single mode fiber optic cables that needs to be linked to the receiving unit AV-GM04G3-S1-RX


Receiving unit ► AV-GM04G3-S1-RX

Front Panel

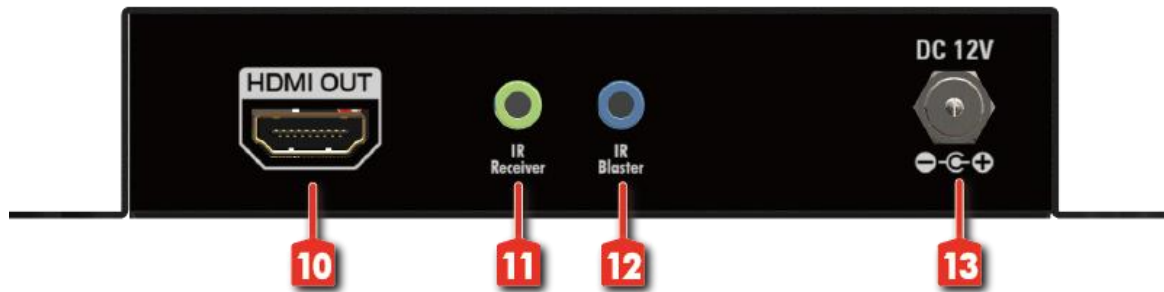

- 10. HDMI OUT:** Connect to a HDMI display with a HDMI male-male cable
- 11. IR Receiver:** Infrared 3.5mm socket for plugging in the extension cable of IR receiver
- 12. IR Blaster:** Infrared 3.5mm socket for plugging in the extension cable of IR blaster
- 13. +12V DC:** Connect to a 12V power supply unit


Rear Panel

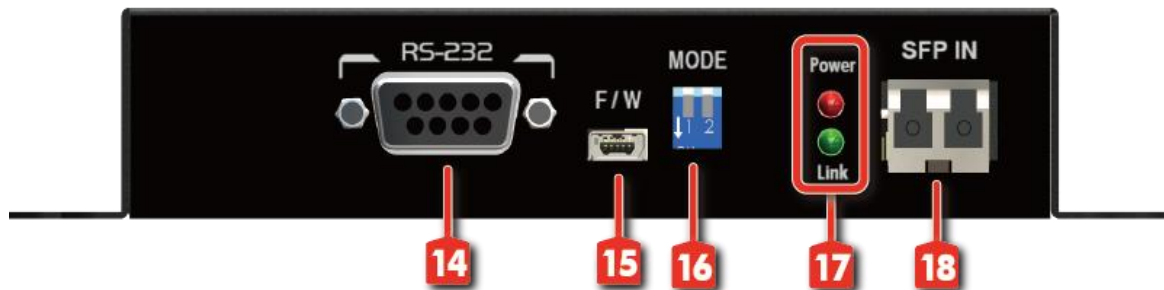

- 14. RS-232:** Connect to serial port device with a DSUB-9 male-male or male-female cable here
- 15. Mini-USB:** F/W update
- 16. Dip Switch**
 - [Pin 1]: F/W update mode
OFF [▲] – Normal; ON [▼] – FW update
 - [Pin 2]: Reserved
- 17. LED indicator:**
 - [Red]: Power LED indicator
 - [Green]: Link LED indicator
- 18. SFP IN:** Plug in single mode fiber optic cables that needs to be linked to the transmitting unit AV-GM04G3-S1-TX

CONNECTION DIAGRAM

→ HDMI
→ FIBER

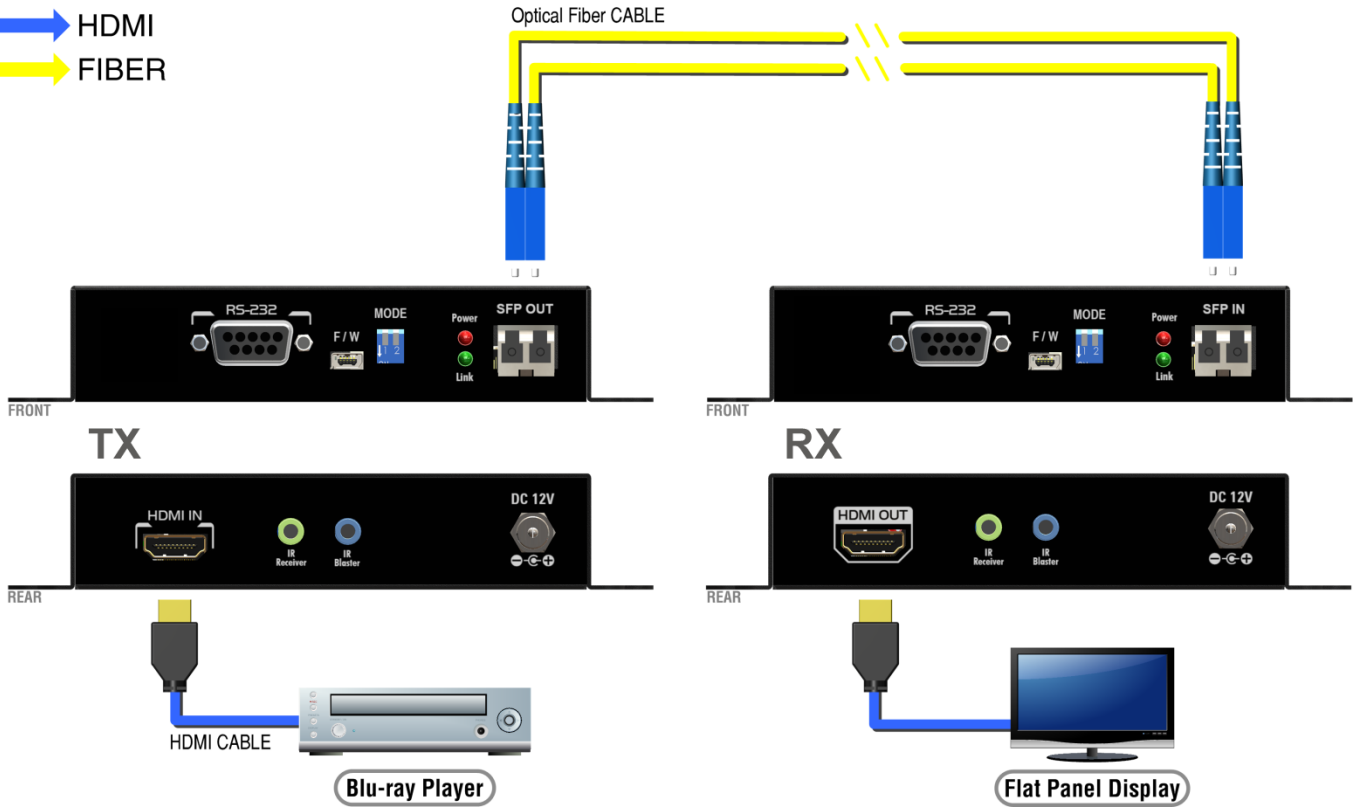

IR PASS-THROUGH

IR Extenders

IR Blaster



IR Receiver



IR Sockets

IR BLASTER: plug in the IR blaster to emit all IR command signals received from the IR receiver from the other end to control the devices corresponding to the IR signals.

IR RECEIVER: plug in the IR receiver to receive all IR command signals from the IR remote controls of the corresponding devices.

CAUTION!

Incorrect placement of IR Blaster and Receiver may result in the failure of the IR extenders. Please check carefully before plugging in the IR extender to the respective IR sockets. Warranty will not cover the damage.

Definition of IR Earphone Jack

IR Blaster




IR Receiver





You can buy any IR extension cables in the market that are compatible to the definition of the IR sockets for the matrix if necessary for replacement use. However, IR cables longer than 2m (6-ft) may not work.

HDMI PIN DEFINITION

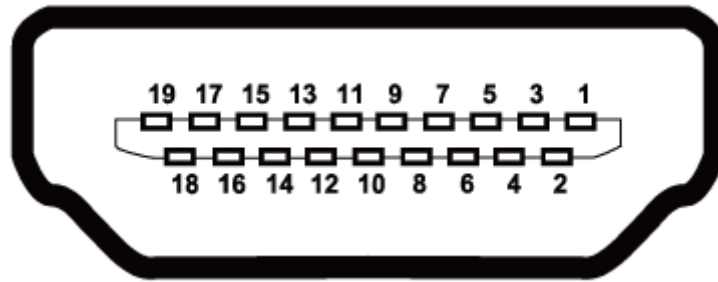

Type A (Receptacle) HDMI

Pin 1	TMDS Data2+	Pin 11	TMDS Clock Shield
Pin 2	TMDS Data2 Shield	Pin 12	TMDS Clock-
Pin 3	TMDS Data2-	Pin 13	NC
Pin 4	TMDS Data1+	Pin 14	Reserved (N.C. on device)
Pin 5	TMDS Data1 Shield	Pin 15	SCL
Pin 6	TMDS Data1-	Pin 16	SDA
Pin 7	TMDS Data0+	Pin 17	DDC/CEC Ground
Pin 8	TMDS Data0 Shield	Pin 18	+5V Power
Pin 9	TMDS Data0-	Pin 19	Hot Plug Detect
Pin 10	TMDS Clock+		

WARRANTY

The SELLER warrants the **AV-GM04G3-S1 4K-HDRHDMI over FiberExtender** free from defects in the material and workmanship for 3 years from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 3 years warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surge. This warranty is offered by the SELLER for its BUYER with direct transaction only. This warranty is void if the warranty seal on the metal housing is broken.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables and power adapters are limited to a 30 day warranty and must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. **Also, the technical information contained herein regarding the AV-GM04G3-S1 features and specifications is subject to change without further notice.**

Support

For more info or tech support
<http://www.siig.com/support>

