



## 5x2 HD/SD-SDI Matrix Switch



P/N: AV-GM09J3-S1



## Safety and Notice

The **AV-GM09J3-S1 5x2 HD/SD-SDI Matrix Switch** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the **AV-GM09J3-S1** should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.




### **TABLE OF CONTENTS**

INTRODUCTION.....	1
FEATURES.....	1
PACKAGE CONTENTS .....	1
SPECIFICATIONS .....	2
PANEL DESCRIPTIONS.....	3
HARDWARE INSTALLATION .....	5
IR REMOTE CONTROL .....	5
WARRANTY.....	5

# INTRODUCTION

The AV-GM09J3-S1 receives, equalizes, and reclocks\* up to 8 SDI inputs, perfectly switches the desired input to SDI equipped monitors or receivers. The switch supports both HD/SD-SDI bit rates, and the re-transmitted quality is guaranteed. Through RS-232, IR remote, or front panel push button, the control of the SDI switch becomes versatile and easier. AV-GM09J3-S1 offers the most convenient and cost effective means for swift switch and duplication of high quality SDI in the market.

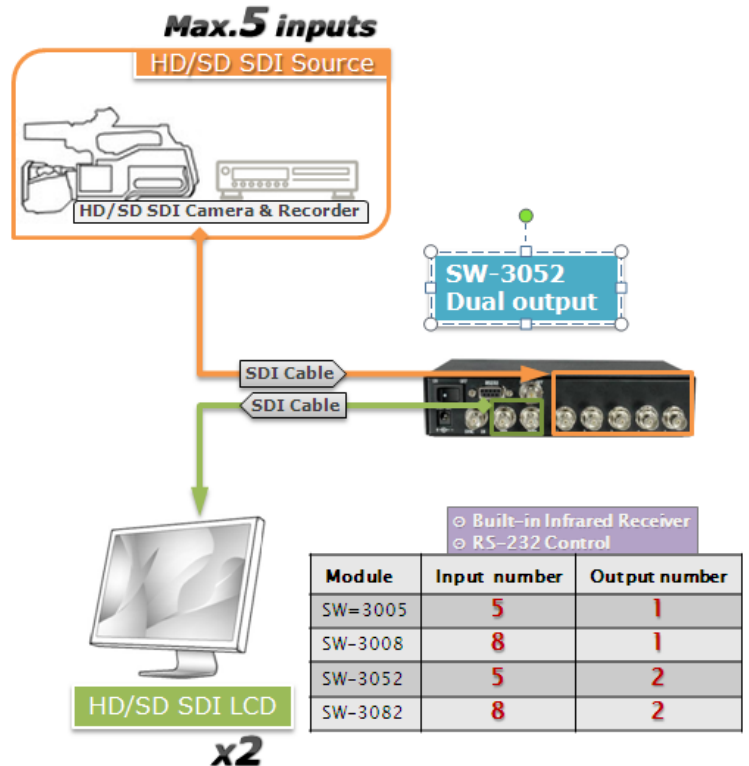

**i** \*Optional upon request

## FEATURES

- HD/SD-SDI Switch
- Up to 5 equalized & re-timing SDI inputs\*
- Dual Color LED indication of HD/SD of the output SDI
- Automatic detection of the SDI Input
- Synchronizes input/output (switch after vertical sync)
- Low-cost 5x2 HD/SD (dual-rate) switch with dual outputs
- Provides the equalized and reclocked\* transmission path up to 300m (1000ft) at SD-SDI or 150m (500ft) at HD-SDI
- Multiple control by RS-232, IR remote, and push button

## PACKAGE CONTENTS

- 1 x AV-GM09G3-S1 / AV-GM09J3-S1 / AV-GM09J3-S1 / AV-GM09K3-S1
- 1 x IR remote controller
- 1 x 5V power adapter
- 1 x User Manual

# SPECIFICATIONS


Model Name		AV-GM09G3-S1	AV-GM09J3-S1	AV-GM09J3-S1	AV-GM09K3-S1
Technical					
Role of usage		5x1 switch	5x2 matrix switch	8x1 switch	8x2 matrix switch
SDI standards		SD-SDI & HD-SDI			
Auto HD/SD-SDI detection		Yes			
Supported protocols		SMPTE 259M / SMPTE 292M			
Video bandwidth		Single-link [1.485Gbps & 1.485/1.001Gbps]			
Data rates		143 / 270 / 1483 / 1485 Mbps			
Video support		[HD] 720p50/59.94/60, 1035i50/59.94/60, 1080i50/59.94/60, 1080p24/30 [SD] NTSC@59.94Hz, PAL@50Hz			
Output impedance		75Ω			
Reclocking function		Optional upon request			
Cable equalization		[HD-SDI] up to 150m (500ft) / [SD-SDI] up to 300m (1000ft)			
Loop-out		Synchronized BNC loop-out at input and output			
Audio support		Yes			
RP-918 pathological patterns		Immune			
PCB stack-up		4-layer board [impedance control — differential 100Ω; single 50Ω]			
Input		5x BNC [SDI]	5x BNC [SDI]	8x BNC [SDI]	8x BNC [SDI]
Output		1x BNC [SDI]	2x BNC [SDI]	1x BNC [SDI]	2x BNC [SDI]
BNC connector		75Ω inter-locked socket			
Eye pattern characteristics (HD-SDI)		Amplitude: Within 800mV ±3% (<10%) Rise overshoot: Less than 2% (<10%) Fall overshoot: Less than 2% (<10%)		Long time jitter: 0.195UI (<1.0UI) Timing jitter: 0.195UI (<1.0UI) Alignment jitter: 0.127UI (<0.2UI)	
Mechanical					
Housing		Metal case			
Dimensions [L x W x H]	Model	187 x 125 x 43mm [7.4"x4.9"x1.7"]			
	Package	330 x 200 x 95mm [1'1"x7.9"x3.7"]			
	Carton	495 x 440x 380mm [1'7.5"x1'5.3"x1'3"]			
Weight	Model	890g [2.0 lbs]	890g [2.0 lbs]	890g [2.0 lbs]	890g [2.0 lbs]
	Package	TBA	TBA	TBA	TBA
Fixedness		Inter-locked power supply			
Power supply		5V 4A DC			
Power consumption		10 Watts [max]			
Operation temperature		0~40°C [32~104°F]			
Storage temperature		-20~60°C [-4~140°F]			
Relative humidity		20~90% RH [no condensation]			



The measurement results are from Tektronix VFM-700 with SDI through 1m (3.3ft) long Belden 1694A.


## PANEL DESCRIPTIONS

### Front Panel

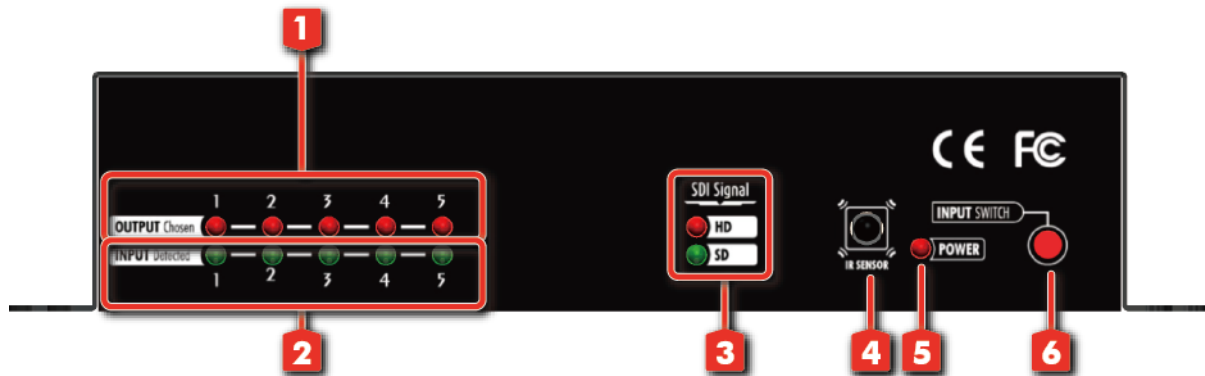

1. Chosen input channel LED
2. Input channel auto detection LED
3. Output HD/SD detection LED
4. IR remote receiver
5. Power indicator LED
6. Push button for input channel switch

### Rear Panel

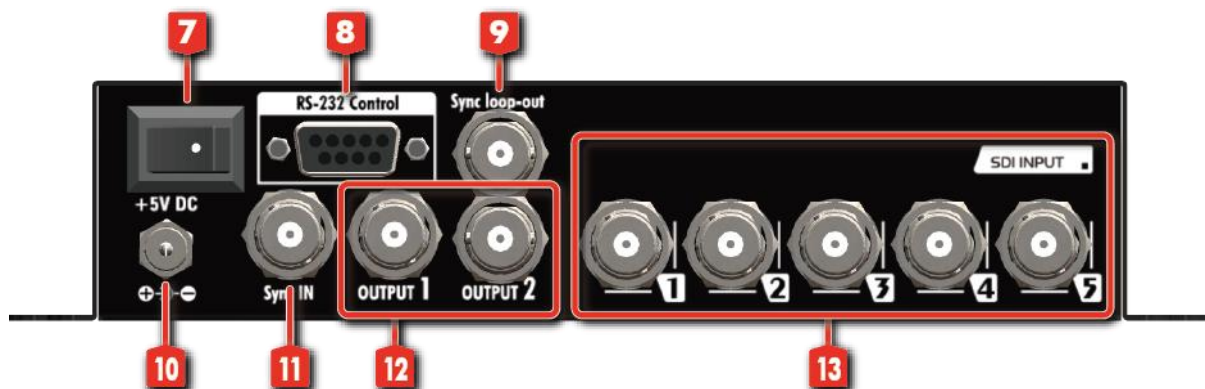

7. Power switch
8. RS-232 control port for PC control
9. Synchronized signal loop-out (add 75Ω terminator if not connect)
10. 5V DC power jack
11. Sync IN
12. OUTPUT 1
13. OUTPUT 2


11. Synchronized SDI signal input

12. SDI output

13. SDI input


# HARDWARE INSTALLATION

1. Connect SDI enable equipments to the output of AV-GM09J3-S1.
2. Connect the SDI input sources to the inputs of AV-GM09J3-S1.
3. Plug power adapter cable into 5V DC power jack.
4. Use IR remote, RS-232, or front panel push button to switch between input channels.

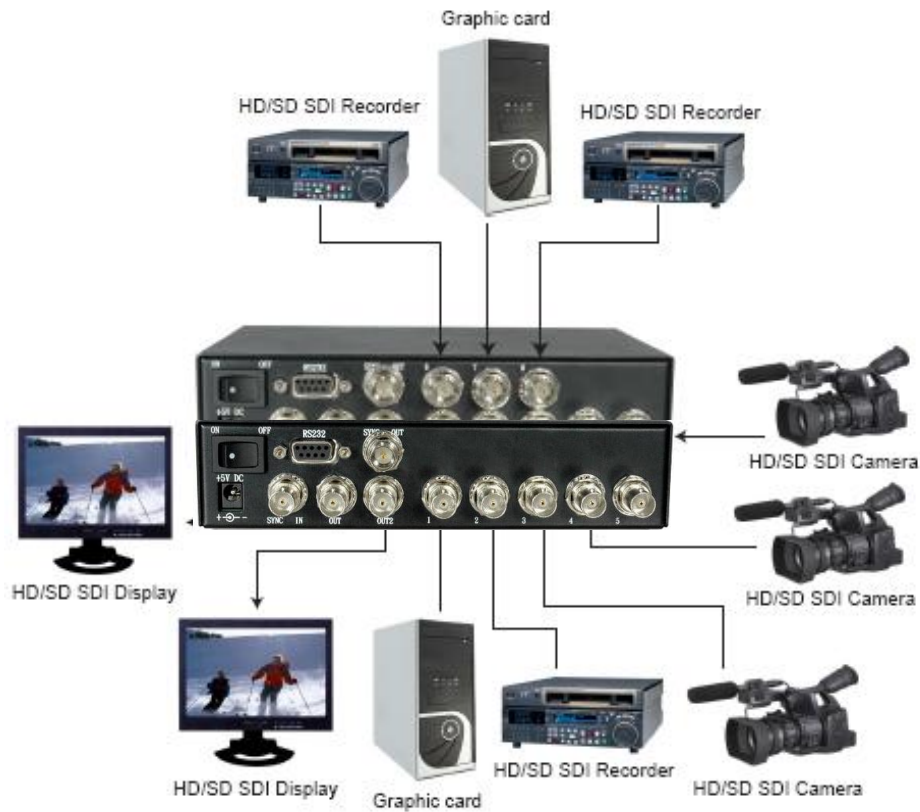

## IR REMOTE CONTROL

Button	Function
FREEZE	Freeze video
ASPECT RATIO	Aspect ratio change
BLANK	Blank video
EXIT	Exit OSD
ENTER	Enter key
UP	Up key
LEFT	Left key
RIGHT	Right key
DOWN	Down key
MENU	Menu on
INPUT INFO	Source resolution information
1080p60	Select 1080p60 output resolution
1080i60	Select 1080i60 output resolution
720p60	Select 720p60 output resolution
480p60	Select 480p60 output resolution

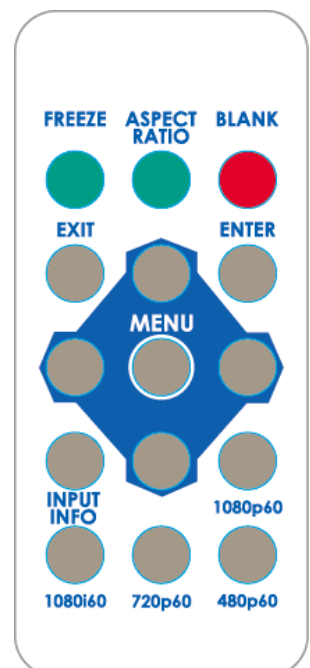

# WARRANTY

The SELLER warrants the **AV-GM09J3-S1 5x2 HD/SD-SDI Matrix Switch** to be free from defects in the material and workmanship for 3 years from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 3 years warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. **Also, the technical information contained herein regarding the AV-GM09J3-S1 features and specifications is subject to change without further notice.**

## Support

For more info or tech support  
<http://www.siig.com/support>