


Features

- New Gallium Nitride (GaN) semiconductor material
- Supports AC input 100-240V, 50/60Hz, 3A
- **4 ports total output 200W max**
- USB-C ports supports PD 3.0, PPS, up to 100W max
- USB-A Ports supports QC 3.0 up to 22.5W max
- LCD display shows the current data of each port in real time.
- Over-load, Over-voltage, over-current and short circuit protection.

Package contents

- 200W GaN PD Charger with Charging Display
- AC power cable
- Stand
- Carrying pouch
- Quick Start Guide

Layout

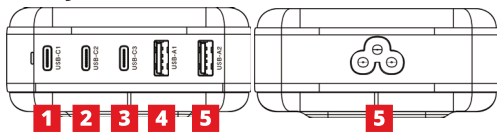

1. USB-C PD Output 1:

100W max
5V/3A,9V/3A,12V/3A,15V/3A,20V/5A

2. USB-C PD Output 2:

100W max
5V/3A,9V/3A,12V/3A,15V/3A,20V/5A

3. USB-C PD Output 3:

100W max
5V/3A,9V/3A,12V/3A,15V/3A,20V/5A

4. USB-A QC3.0 Output 1:

22.5W max
5V/4.5A, 9V/2A,12V/1.5A

5. USB-A QC3.0 Output 2:

22.5W max
5V/4.5A, 9V/2A,12V/1.5A

6. AC input:

100-240V 50/60Hz, 3A max

Multiport Charging Rules

Every ports will have different output limit when multi-port charging at the same time, let every ports can get proper power to charge devices to avoid over loading.

Single port used

USB-C1/C2/C3 Output: 100W

USB-A1/A2 Output: 22.5W

Dual ports used

USB-C1+USB-C2 Output: 100W+100W

USB-C1+USB-C3 Output: 100W+100W

USB-C2+USB-C3 Output: 100W+100W

(USB-C1/C2/C3)+USB-A1 Output: 100W+22.5W

(USB-C1/C2/C3)+USB-A2 Output: 100W+22.5W

USB-A1+USB-A2 Output: 12W+12W

Triple ports used

USB-C1+USB-C2+USB-C3 Output:

100W+65W+30W

USB-C1+USB-C2+ USB-A1/A2 Output:

100W+65W+22.5W

USB-C1+USB-C3+ USB-A1/A2 Output:

100W+65W+22.5W

USB-C2+USB-C3+USB-A1/A2 Output:

100W+65W+22.5W

(USB-C1/C2/C3)+USB-A1+USB-A2 Output:

100W+7.5W+7.5W

Quad ports used

USB-C1+USB-C2+USB-C3+USB-A1/A2

Output:100W+65W+20W+15W

USB-C1+USB-C2+ USB-A1+USB-A2 Output:

100W+65W+7.5W+7.5W

USB-C1+USB-C3+ USB-A1+USB-A2 Output:

100W+65W+7.5W+7.5W

USB-C2+USB-C3+USB-A1+USB-A2 Output:

100W+65W+7.5W+7.5W

Full ports used

USB-C1+USB-C2+USB-C3+USB-A1+USB-A2

Output:100W+65W+20W+7.5W+7.5W

Note:

1. If without loading, its internal consumption is about <300mW.
2. Always Unplug the Charger from the power source when not in use
3. DO NOT place the Charger on heated surface or next to other heat sources
4. DO NOT attempt to replace any parts or open the case of the Charger, opening the case can cause personal injury due to electrical hazard and will void the manufacturer warranty
5. DO NOT expose the Charger to liquids or excessive heat
6. DO NOT use corrosive cleaning substances on the Charger Keep out of the reach of children
7. For optimal charging speed, we recommend using your device's original equipment USB charging cable.

Dear Valued Customer

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~

Support

For more info or tech support
<http://www.siig.com/support>



**200W GaN PD Charger
with Charging Display**

Quick Start Guide

