



USB 2.0 4-Port Bay Hub

Quick Installation Guide

Introducing the *USB 2.0 4-Port Bay Hub*

The *USB 2.0 4-Port Bay Hub* is designed to support USB 2.0 equipped PC computers. This USB 2.0 hub expands USB connectivity to your computer.

Features and Benefits

- Compliant with USB Specifications, Revision 2.0
- Drive bay design adds ports to the front of your computer for convenient device connection
- Fits into either 3.5" or 5.25" (with included mounting rack) drive bay
- Provides 4 downstream ports for USB device connections
- Supports high-speed (480Mbps), full-speed (12Mbps), and low-speed (1.5Mbps) data transfer modes
- Per port over-current detection and protection
- Supports simultaneous operation of multiple high-speed USB 2.0 and USB 1.1 devices
- Hot-swapping feature allows you to attach/detach USB devices without powering your computer off

Note: USB 1.1 devices are limited to USB 1.1 speeds even when they are connected to a USB 2.0 host adapter or USB 2.0 hub.

System Requirements

- PC computer with one available internal USB 2.0 port
- One empty 3.5" or 5.25" drive bay
- Windows 98 SE/ME/2000/XP/Server 2003

Package Contents

- *USB 2.0 4-Port Bay Hub*
- (1) "Y" split power cable
- (1) USB 2.0 cable
- (1) 5.25" mounting rack
- (1) Bag assorted holding screws
- This quick installation guide

Hub Layout

Important: The bay hub is shown in white in this manual. However, it is available in either black or white depending on the model purchased.

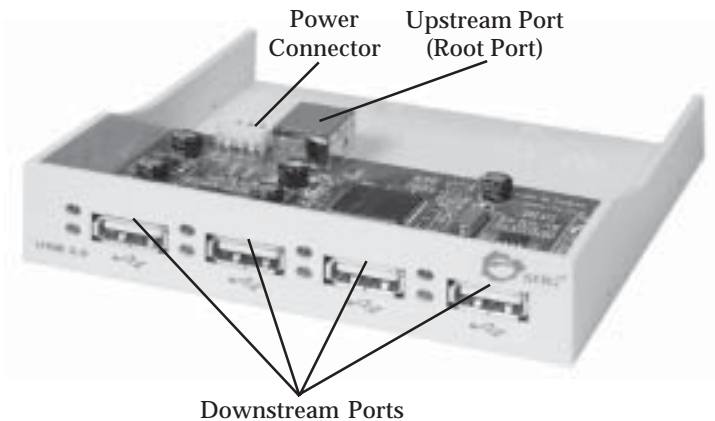


Figure 1. Hub layout

5.25" Mounting Rack Assembly

Important: Use the Mounting Rack Assembly **only** when installing the hub into a 5.25" drive bay.



Figure 2. 5.25" Mounting Rack Assembly

USB Cable Connectors



Type A connector



Type B connector

Figure 3. USB Cable Connectors

Installing the *USB 2.0 4-Port Bay Hub*

Important: In order for the *USB 2.0 4-Port Bay Hub* to work properly, the driver of your existing **USB 2.0 host adapter** has to have support for **USB 2.0 hubs**.

1. Turn OFF the power to your computer and all connected peripheral devices.
2. Unplug the power cord from the back of the computer.
3. Remove the computer's cover.
4. Select an available 3.5" or 5.25" drive bay for the *USB 2.0 4-Port Bay Hub*, remove the cover plate from the selected drive bay.

Note: When installing the *USB 2.0 4-Port Bay Hub* into a 5.25" drive bay install the hub into the 5.25" mounting rack before mounting into the drive bay and follow the same assembly instructions. Refer to **5.25" Mounting Rack Assembly** on page 3.

5. Use the included "Y" split power cable and plug in the mini power connector (same type of power connector used for the floppy drive) to the *USB 2.0 4-Port Bay Hub's* power connector.



Figure 4. Connecting the Power Connector Cable

6. Connect the Type B connector of USB cable into the upstream port (root port) of the *USB 2.0 4-Port Bay Hub*.

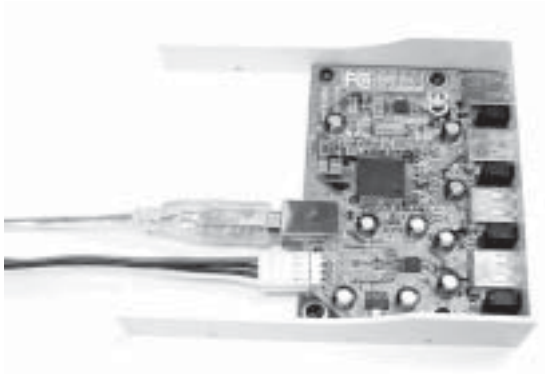


Figure 5. Connecting the USB 2.0 Cable

7. Carefully thread the two cables through the drive bay opening then push the hub assembly into the drive bay. Align the hub's screw holes with the appropriate holes in the drive bay, then carefully attach the hub to the case using the included mounting screws. Be careful not to overtighten the mounting screws.


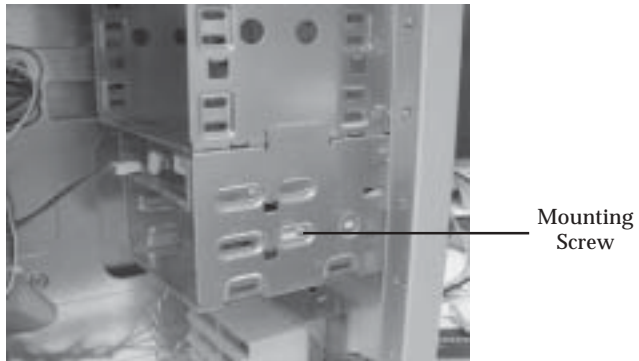


Figure 6. Mounting the Hub Assembly

8. Connect the Type A connector of the USB cable to the internal USB 2.0 port in your system.

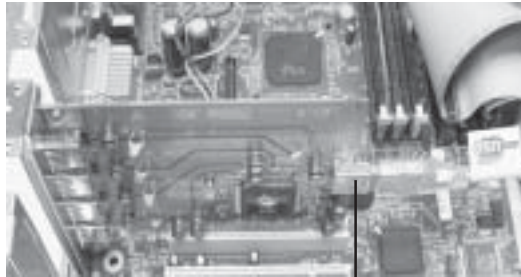

USB 2.0 Port

Figure 7. Internal USB connection

9. Connect the power connector of the "Y" split power cable to the system power supply.
10. Replace the computer's cover and reconnect the power cord, then turn the system on.
11. When Windows boots up, the *USB 2.0 4-Port Bay Hub* automatically gets detected and installed. The hub is now ready for device connection.
12. Connect the Type A connector of your USB device(s) into any of the downstream ports on the *USB 2.0 4-Port Bay Hub*.

Technical Support

QUESTIONS? SIIG's **Online Support** has the answers! Simply visit our Web site at ***www.siig.com*** and click on **Support**. Our online support database is updated daily with new drivers and solutions. The answers to your problems could be just a few clicks away.

If you can't find answers or solutions to your questions, you have an option to submit the problems online to one of our technical support analysts and we will promptly respond to you with answers or solutions.

The 5-year manufacturer warranty supplied with this product is offered by SIIG, Inc. If you should happen to encounter any problems with this product, please follow the procedures below.

1. If it is within the store's return policy period, please return the product to the store where you purchased from.
2. If your purchase has passed the store's return policy period, please contact SIIG. See SIIG's Limited 5-year Warranty card for more information.

Online Store

SIIG offers all of our products online at our company store. Visit us at **<http://onlinestore.siig.com>** to find our complete line of products, including hard to find items and accessories (power adapters, cables, upgrade kits, etc.).

About SIIG, Inc.

Founded in 1985, SIIG, Inc. is a leading computer upgrade manufacturer of I/O connectivity products, including PCI & ISA serial and parallel ports, USB, Serial ATA & UltraATA controllers, FireWire (1394a/b), Networking, Sound Cards, and other accessories. SIIG is the premier one-stop source of upgrades.

SIIG products offer comprehensive user manuals, many user-friendly features, and all products are backed by a 5-year manufacturer warranty. High-quality control standards are evident by the overall ease of installation and compatibility of our products, as well as one of the lowest defective return rates in the industry. SIIG products can be found in most computer retail stores, mail order catalogs, and e-commerce sites in the Americas and the UK, as well as through major distributors, system integrators, and VARs.

PRODUCT NAME

USB 2.0 4-Port Bay Hub

FCC RULES: TESTED TO COMPLY WITH FCC PART 15, CLASS B
OPERATING ENVIRONMENT: FOR HOME OR OFFICE USE

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**THE PARTY RESPONSIBLE FOR
PRODUCT COMPLIANCE**

SIIG, Inc.
6078 Stewart Ave.
Fremont, CA 94538-3152

USB 2.0 4-Port Bay Hub is a trademark of SIIG, Inc.
SIIG and SIIG logo are registered trademarks of SIIG, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation. Pentium is a registered trademark of Intel Corporation. Other names used in publication are for identification only and may be trademarks of their respective companies.