

Dear Valued Customer

(JUST WANTED YOU TO KNOW)

WE REALLY
APPRECIATE
YOUR PURCHASE

~thank you~

Features


- HDMI 1.3 & HDCP 1.4 compliant
- Build-in EDID, resolution up to 1080p@60Hz
- Transmitter supports one HDMI loop-out
- Transmission distance is up to 60m via CAT6 cable, 50m via CAT5e cable
- Compatible with IEEE-568B Cat5e/6 cables
- Support 2.0 stereo audio
- Receiver can be powered by CAT5e/6 cable and only transmitter needs power supply

Package contents

1. HDMI KVM Transmitter
2. HDMI KVM Receiver
3. Power adapter 5V/2A
4. USB A to A cable
5. Quick start guide


Layout

TX transmitter




	Reset button	Restart the device
	USB indicator	Fast flashing means the PC have connected Slow flashing means no connection
	USB port	Connect with PC
	RJ-45 port	Connect with Cat5e/6 cable
	Video indicator	Keeps on while connecting to HDMI signal Flashing when no HDMI signal
	Power input	Connect with DC 5V/2A power adapter
	HDMI input	Connect with HDMI source

RX receiver




Reset button	Restart the device
USB indicator	Fast flashing means the PC have connected Slow flashing means no connection
USB port	Connect with keyboard or mouse
RJ-45 port	Connect with Cat5e/6 cable
Video indicator	Keeps on while connecting to HDMI signal Flashing when no HDMI signal
Power input	Connect with power adapter (optional)
HDMI output	Connect with HDMI display

Application

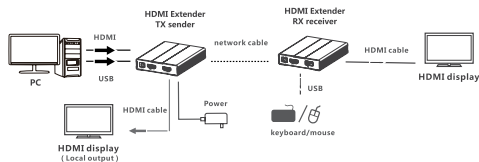

Full HD HDMI KVM
over Cat 6 Extender - 60M

Quick Start Guide

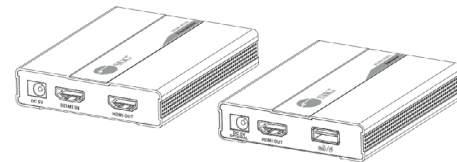

Support

For more info or tech support
<http://www.siig.com/support>