

Dear Valued Customer

(JUST WANTED YOU TO KNOW)

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~


Features

- Support 2xHDMI switch in, 2xHDMI splitter out
- Switch two input source by Function button
- HDMI 2.0 Support 4K@60Hz YUV4:4:4 Bandwidth up to 18Gbps
- Support HDCP2.2/ HDCP1.4
- Support HDR10, Dolby vision & Dolby Atmos
- Support PCM and digital 7.1ch audio
- Support Audio Extractor via 3.5mm for stereo 2ch Audio out
- Two HDMI in have separate EDID management (auto EDID, copy EDID & mixed EDID)
- Support resolution auto down scaling via HDCP detect
- Micro USB support firmware upgrade

Package contents

- 2-Port HDMI 2.0 4K HDR Splitter/Switcher
- Power adapter DC 5V/1A
- USB A to Micro-B cable
- Remote control
- Quick Start Guide

Layout

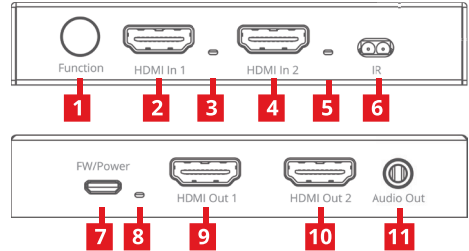

- 1. Function:** switch to HDMI in 1 or HDMI in 2
- 2. HDMI in 1:** connect to HDMI source
- 3. HDMI Input 1 & EDID Indicator:**
- 4. HDMI in 2:** connect to HDMI source
- 5. HDMI Input 2 & EDID Indicator:**
- 6. IR:** sensor for remote control
- 7. FW/Power:** power 5V/1A and FW update
- 8. Power LED:** red on/off
- 9. HDMI output 1:** connect to HDMI display
- 10. HDMI output 2:** connect to HDMI display
- 11. Audio out 3.5mm:** Stereo output, when source audio more than 2ch audio, 3.5mm will be disable for Mute

HDMI Input & EDID Indicator

- RED color: Auto EDID
- Green color: Copy EDID
- Red/Green dual color: Mix EDID
- No LED: no HDMI signal

EDID management


- Auto EDID: Default 3840x2160 @60Hz
- Copy EDID: Copy EDID from HDMI Output 1
(Only copy EDID can support HDR, Dolby Vidion & Atmos)
- Mixed EDID: Always follow the lowest resolution of the displays connected to 2 outputs, in order to support all display, show the source.

Auto down scaling via HDCP detect

Input source	Display with HDCP 2.2	Display without HDCP 2.2
HDCP 2.2 4K@60	HDCP 2.2 4K@60	HDCP 1.4 1080p@60
HDCP 2.2 4K@24	HDCP 2.2 4K@24	HDCP 1.4 1080p@24
HDCP 1.4 4K@30	HDCP 1.4 4K@30	HDCP 1.4 4K@30

***Not support 4K60Hz 422 Down Scaling**

Remote control



	Reserved
1	Switch to HDMI input 1
2	Switch to HDMI input 2
3	Device Standby/Wake up
4	HDMI input 1 EDID Mode Auto / Copy / Mix for Cyclic Switch
5	HDMI input 2 EDID Mode Auto / Copy / Mix for Cyclic Switch

Support

For more info or tech support

<http://www.siig.com/support>



2-Port HDMI 2.0 4K HDR Splitter / Switcher

Quick Start Guide

