

Features


- Support HDCP 1.3
- Build-in EDID, resolution up to 1080p@60Hz
- HDMI wireless transmission distance up to 656ft/200m. (In an open environment without Wi-Fi interference.)
- Support one transmitter and multiple receivers, up to 4 receivers.
- Support one-way IR extend
- Support PCM 2ch audio
- 5G Wireless connectivity

Package contents

1. Wireless HDMI Transmitter
2. Wireless HDMI Receiver
3. Power adapter 12V/1A x2
4. 5G WiFi antenna x4
5. IR Emitter Cable (For TX IR out)
6. IR Receiver Cable (For RX IR in)
7. Quick start guide


Layout

Transmitter

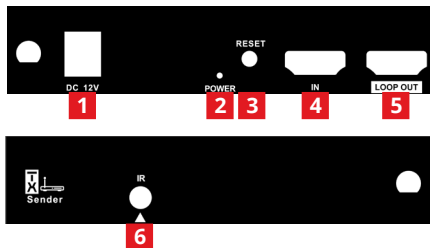

1. DC Power jack:
connect to power adapter DC 12V/1A
2. Power LED:
3. RESET: Restore factory settings after long press for 5s, and require to pair again
4. HDMI In: Connect to HDMI source
5. Loop Out: Connect to HDMI display
6. IR Out: Connect to IR Emitter Cable

Receiver

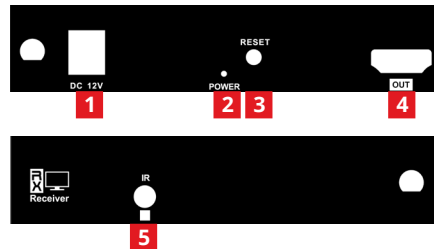


1. DC Power jack:
connect to power adapter DC 12V/1A
2. Power LED:
3. RESET: Restore factory settings after long press for 5s, and require to pair again
4. HDMI Out: Connect to HDMI display
5. IR In: Connect to IR Receiver Cable

Pairing Instruction

Pairing Method:

1. Power on the TX & RX
2. Wait for 30 sec
3. Connect HDMI cable to TX input and RX output
4. Wait for 10 sec
5. Remove the HDMI cable, then re-plug the power to restart the TX & RX

Application

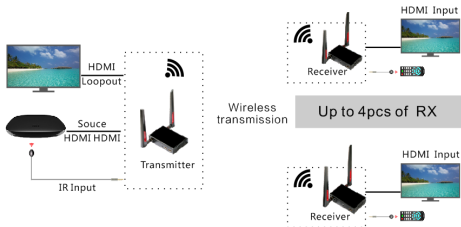

Dear Valued Customer

**WE REALLY
APPRECIATE
YOUR PURCHASE**

~thank you~

Support

For more info or tech support
<http://www.siig.com/support>



**Full HD Wireless HDMI
Extender with Loopout & IR Kit**

Quick Start Guide



**TWO
YEAR
Manufacturer
Warranty**