Features

- Power Deliver charge up to 100W
- Supports up to 3840x2160@30Hz resolutions (single display only)
- Supports up to 1920x1080@60Hz resolutions (dual display connection, both DisplayPort and HDMI display)
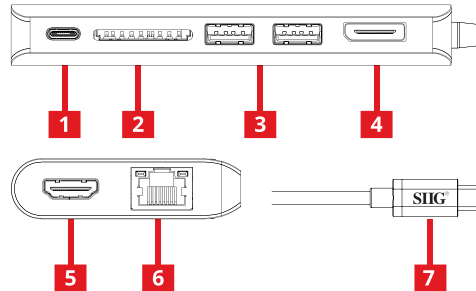- Only Windows support MST function

Package contents

- USB-C MST Video Hub LAN & PD 3.0 Dock
- Quick Start Guide

System Requirements

- USB-C Port (Thunderbolt 3 compatible) device with DP Alt mode support
- Windows® 10 / 8 .1/ 8 / 7 (32/64 bit)

Layout

1. **USB-C PD port:** support PD charging 100W & USB 3.0 data transmission
2. **SD Card Slot:** SD 2.0 compliant, up to 40MB/s data transfer rate. SDHC capacity up to 32GB, SDXC capacity up to 2T.
3. **USB-A 3.0 port x2**
4. **DP output:** max resolution 4K@30Hz
5. **HDMI output:** max resolution 4K@30Hz
6. **Gigabit Ethernet:**
7. **USB-C host port** connect to laptop

Note:

1. The source USB-C output must support DisplayPort Alternate (DP Alt) mode or Thunderbolt 3 technology for the dock to work properly. Please verify with your computer manufacturer.
2. The computer and power adapter must support PD 3.0 specification, otherwise the docking will reset when power delivery is disconnected
3. Mac OSes do not support MST, the dock becomes a splitter displaying the same content on both displays
4. When using two monitors,monitor's max resolution can't be over the **MAX** resolution 1080p. e.g. 1080p + 1080p can only use two resolutions up to 1080p monitors. 4K monitor downgrade to 1080p will not be supported.

SIIG®

USB-C MST Video Hub LAN & PD 3.0 Dock

Quick Start Guide

TWO YEAR
Manufacturer
Warranty

Support

For more info or tech support
http://www.siig.com/support